

Hydraulic Wedgie and Spread Cylinders

▼ Shown from top to bottom: WR-15, A-92, WR-5




A/WR Series

Capacity:
0,75 - 1 ton


Tip Clearance:
12,8 mm

Maximum Spread:
292 mm


Maximum Operating Pressure:
700 bar

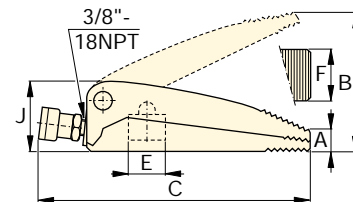

WR-5

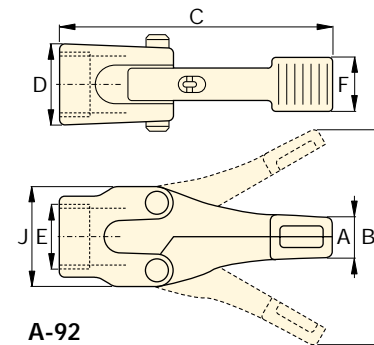

A-92

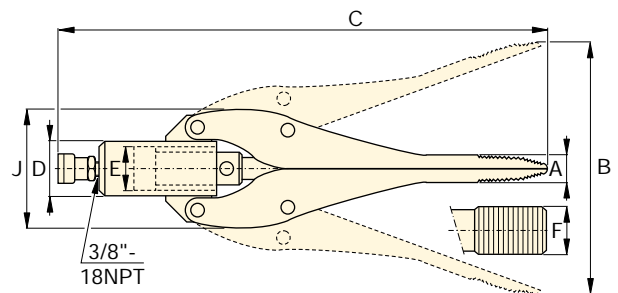


WR-15

- **WR-15:** For long stroke spreading applications
- **WR-5:** For use in very confined work areas
- **A-92:** Spreader attachment; threads on RC-Series 10 ton cylinders (except RC-101)
- **Single-acting, spring return**

▼ A WR-5 wedgie cylinder is used to position a concrete block on a construction site.



Cylinder Capacity ton (kN)	Tip Clearance (mm)	Model Number	Cylinder Effective Area (cm ²)	Oil Capacity (cm ³)	Dimensions (mm)							 (kg)
					A	B	C	D	E	F	J	
1 (8,9)	12,8	WR-5	6,5	10,0	9	94	223	–	28	51	51	2,3
0,75 (6)	32	WR-15	14,5	64,1	32	292	549	56	42	51	157	11,3
1 (8,9)	35	A-92	–	–	35	158	244	69	2 1/4" - 14 UNS	50	91	3,6